




**MINDS OF STEEL WITH HEARTS OF GOLD**

## WM SLURRY GATE VALVE

The WM SGV – Slurry Gate Valve is engineered to handle demanding applications involving heavy abrasive, and corrosive materials. Its gate features a complete rubber coating, ensuring a leak-tight seal across the entire working pressure range, even in challenging operating conditions. The reinforced gate's design allows for optimal Seal, uniform distribution of sealing pressure, and the ability to accommodate foreign particles while maintaining a leak-tight seal.

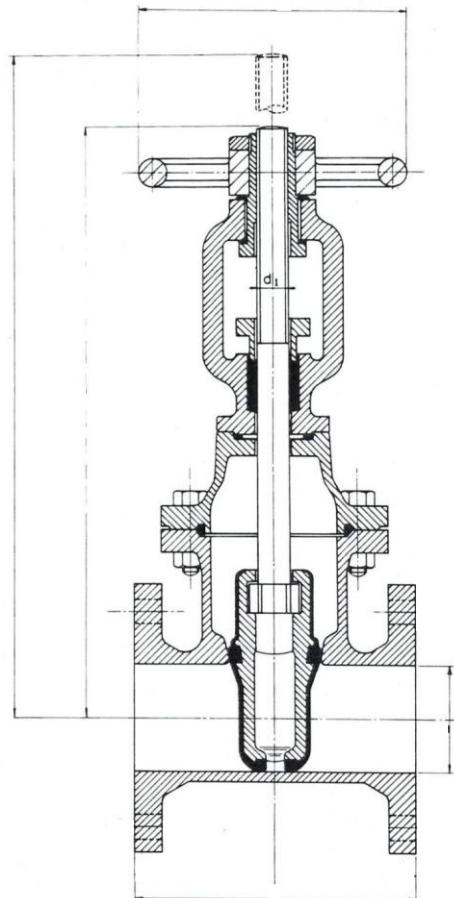

- SABS 665
- Cast SG 42
- PN16/25/40
- Rising Spindle
- 50mm – 500mm
- Fully Rubberlined
- Easy maintenance
- Valve seals in both directions



DIMENSIONS:	DN:	50	80	100	150	200	250	300	350	400	450	500	600
RISING SPINDLE	664	216	229	254	280	317	356	380	470	470	485	510	510
	665	178	203	229	267	292	330	355	381	406	432	457	508
	C	385	434	470	630	786	1004	1081	1120	1230	1777	1822	2000
	D	454	521	575	790	994	1262	1389	1840	1940	2000	2075	2244
	E	250	250	320	400	500	500	500	600	600	600	600	600
	G	170	214	228	310	375	442	514	586	663	700	852	980
	d1	20	24	26	28	32	36	36	50	50	50	50	50

# COMPONENTS

**1. Handwheel** Cast SG 42

**2. Spindle** Stainless Steel 304

**3. Spindle nut** Brass

**4. Yoke** Cast SG 42

**5. Gland** Cast SG 42

**6. Packing material** Graphite Rope

**7. O-ring** Nitrile Rubber

**8. Bonnet** Cast SG 42



**9. Profile ring** Nitrile Rubber

**10. Bolts/Nuts** Grade 8.8 high tensile steel

**11. Gate nut** Stainless Steel 304

**12. Gate** Cast SG 42, Nitrile Rubber covered

**13. Body** Cast SG 42

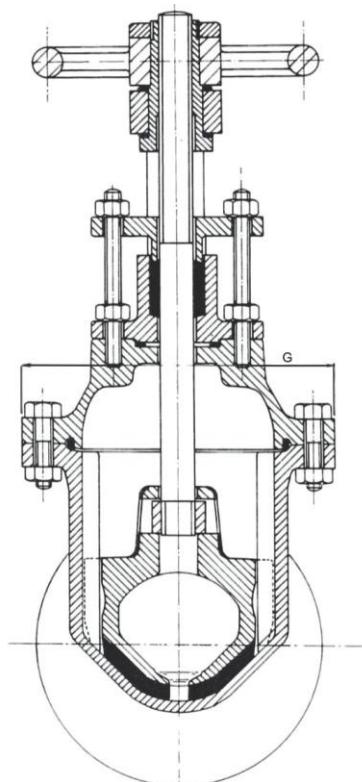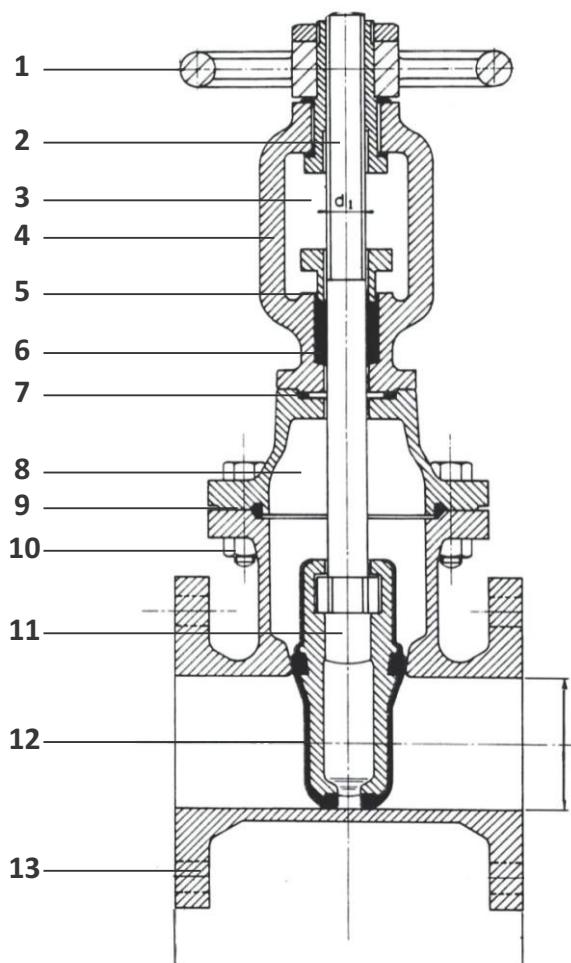

Wynand Mulder 082 8211 910

Vincent Mulder 079 5174 489

Byron Smith 082 3959 900

[www.minetrack.co.za](http://www.minetrack.co.za) • [info@minetrack.co.za](mailto:info@minetrack.co.za)